



Clean-Pak™ Technical Data

*Extended Surface Pocket Filters
Sonic Sealed and Sewn Pocket Construction*


Model Number	Nominal Size (Inches) (H x W x D)	Number of Pockets	Media Area (Sq.Ft.)	Air Flow Capacity (CFM)			Rated Initial Resistance (In.W.G.)				
				375 FPM	500 FPM	625 FPM	90-95%	80-85%	60-65%	50-55%	40-45%
@ 500 FPM											
CP* -A-9-36	24 x 24 x 36	9	113	1500	2000	2500	.42	.33	.27	-	-
CP* -A-8-36	24 x 24 x 36	8	100	1500	2000	2500	.44	.35	.29	-	-
CP* -A-7-36	24 x 24 x 36	7	91	1500	2000	2500	.46	.37	.31	-	-
CP* -A-6-36	24 x 24 x 36	6	78	1500	2000	2500	.49	.40	.33	-	-
CP* -B-3-36	24 x 12 x 36	3	39	750	1000	1250	.49	.40	.33	-	-
CP* -C-6-36	12 x 24 x 36	6	41	750	1000	1250	.49	.40	.33	-	-
CP* -F-5-33	20 x 20 x 33	5	51	1050	1400	1750	.51	.42	.37	-	-
CP* -A-10-32	24 x 24 x 32	10	112	1500	2000	2500	.45	.36	.30	-	-
CP* -B-5-32	24 x 12 x 32	5	56	750	1000	1250	.45	.36	.30	-	-
CP* -A-10-29	24 x 24 x 29	10	101	1500	2000	2500	.47	.38	.32	-	-
CP* -A-8-29	24 x 24 x 29	8	81	1500	2000	2500	.45	.36	.30	.23	-
CP* -A-6-29	24 x 24 x 29	6	63	1500	2000	2500	.49	.40	.34	.26	-
CP* -B-4-29	24 x 12 x 29	4	41	750	1000	1250	.45	.36	.30	.23	-
CP* -B-3-29	24 x 12 x 29	3	32	750	1000	1250	.49	.40	.34	.26	-
CP* -C-6-29	12 x 24 x 29	6	33	750	1000	1250	.49	.40	.34	.26	-
CP* -D-5-29	24 x 20 x 29	5	53	1250	1650	2050	.49	.40	.34	.26	-
CP* -E-6-29	20 x 24 x 29	6	53	1250	1650	2050	.49	.40	.34	.26	-
CP* -A-10-25	24 x 24 x 25	10	88	1500	2000	2500	.48	.39		-	-
CP* -A-10-22	24 x 24 x 22	10	77	1500	2000	2500	.52	.46		-	-
CP* -A-8-22	24 x 24 x 22	8	62	1500	2000	2500	.50	.44		.29	-
CP* -B-5-22	24 x 12 x 22	5	39	750	1000	1250	.52	.44		-	-
CP* -B-4-22	24 x 12 x 22	4	31	750	1000	1250	.50	.46		.29	-
CP* -D-7-22	24 x 20 x 22	7	54	1250	1650	2050	.50	.46		.29	-
CP* -A-5-20	24 x 24 x 20	5	39	1500	2000	2500	-	-		-	.12
CP* -A-9-18	24 x 24 x 18	9	57	1500	2000	2500	.57	.50		.34	-
CP* -A-12-15	24 x 24 x 15	12	63	1500	2000	2500	.65	.55		-	-
CP* -A-5-12	24 x 24 x 12	5	22	1500	2000	2500	-	-		-	.17
CP* -B-3-12	24 x 12 x 12	3	14	750	1000	1250	-	-		-	.17
@ 375 FPM											
CP* -A-6-22	24 x 24 x 22	6	47	1500	2000	N/R	.40	.30	.20	.18	-
CP* -B-3-22	24 x 12 x 22	3	24	750	1000	N/R	.40	.30	.20	.18	-
CP* -C-6-22	12 x 24 x 22	6	26	750	1000	N/R	.40	.30	.20	.18	-
CP* -D-5-22	24 x 20 x 22	5	39	1250	1650	N/R	.40	.30	.20	.18	-
CP* -F-5-22	20 x 20 x 22	5	34	1050	1400	N/R	.40	.30	.20	.18	-
CP* -A-6-21	24 x 24 x 21	6	46	1500	2000	N/R	-	-	-	.18	-
CP* -B-3-21	24 x 20 x 21	3	23	750	1000	N/R	-	-	-	.18	-
CP* -D-5-21	24 x 12 x 21	5	38	1250	1650	N/R	-	-	-	.18	-
CP* -F-3-21	20 x 20 x 21	5	33	1050	1400	N/R	-	-	-	.18	-
CP* -A-6-18	24 x 24 x 18	6	38	1500	2000	N/R	.43	.38	.22	.20	-
CP* -B-3-18	24 x 12 x 18	3	19	750	1000	N/R	.43	.38	.22	.20	-
CP* -A-10-15	24 x 24 x 15	10	53	1500	2000	N/R	.40	.35	.19	.16	-
CP* -B-5-15	24 x 12 x 15	5	27	750	1000	N/R	.40	.35	.19	.16	-
CP* -D-8-15	24 x 20 x 15	8	42	1250	1650	N/R	.40	.35	.19	.16	-
CP* -A-6-14	24 x 24 x 14	6	31	1500	2000	N/R	.46	.41	.25	.22	-
CP* -B-3-14	24 x 12 x 14	3	16	750	1000	N/R	.46	.41	.25	.22	-
CP* -A-6-10	24 x 24 x 10	6	22	1500	2000	N/R	-	-	-	.25	-
CP* -B-3-10	24 x 12 x 10	3	11	750	1000	N/R	-	-	-	.25	-

1. Add efficiency designation to complete Model Number: 9=90-95%; 8=80-85%; 6=60-65%; 5=50-55%; 4=40-45%. Add "N" for sewn pocket construction.
 2. Actual size of face dimensions are 5/8" less than nominal. Header thickness is 13/16". Other headers are available: C=1-1/8"; E=1".
 3. Filter depths are measured from front of header to end of pockets with a tolerance of +/- 1". Custom sizes are available on special order.
 4. Performance data is based on the ASHRAE 52.2-2007 test methods. Testing performed at 492 FPM on 24x24 nominal size.
 5. Recommended final resistance is 1.5" W.G.
 N/R - Not Recommended

Product Bulletin

Extended Surface Pocket Filters, Sonic Sealed and Sewn Pocket Construction

Initial Resistance vs. Filter Face Velocity

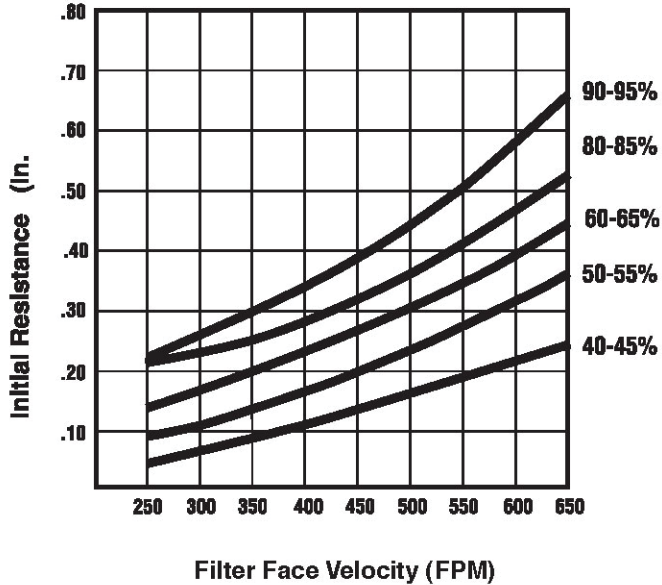


Resistance of CP9, CP8, CP5 is based on the 8 pocket, 29" long model.

Resistance of CP4 is based on the 5 pocket, 12" long model.

Underwriters Laboratories, Inc. Classification
Sonic sealed pockets - U.L. Class 2

Operating Temperature Limit (Continuous)
190°F (88°C)

Efficiency by Particle Size

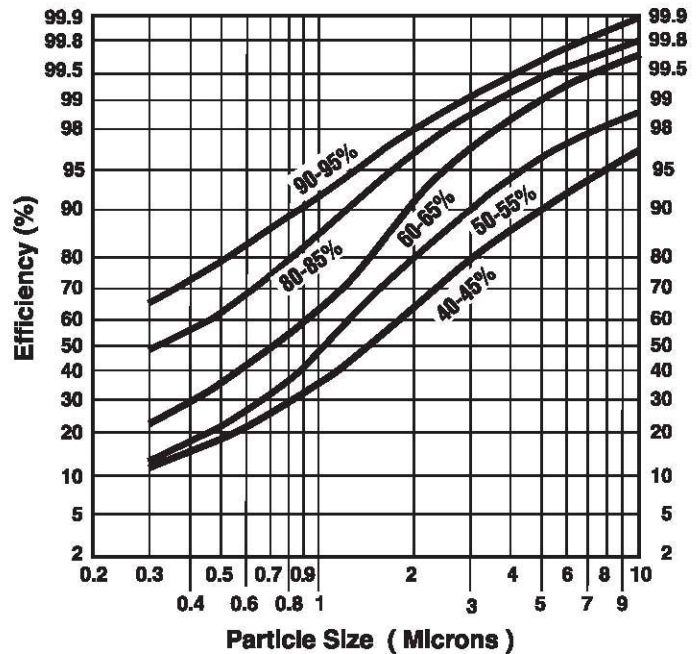

A-CLEANPTECH-609



www.airguard.com



CLARCOR Air Filtration Products
100 River Ridge Circle • Jeffersonville, IN 47130
Customer Care Team: 1-866-247-4827 • Fax: 1-800-784-3458
Email: mailbag@airguard.com • www.airguard.com

Distributed by:

© 2009 CLARCOR Air Filtration Products.
CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice. Terms and Conditions of Sale can be accessed in the "LOGIN" section at www.airguard.com