


MODEL NUMBER	NOMINAL SIZE (INCHES) HXWXD	ACTUAL SIZE (INCHES) HXWXD	RATED AIR FLOW (CFM)¹	INITIAL RESISTANCE (In. W.G.)	MEDIA AREA (SQUARE FEET)	MERV RATING
LG4-904-NH	24X24X4	23-3/8X23-3/8X3-3/4	2000	.43	49.1	14
LG4-912-NH	20X25X4	19-3/8X24-3/8X3-3/4	1750	.43	42.7	14
LG4-915-NH	20X24X4	19-3/8X23-3/8X3-3/4	1650	.43	40.9	14
LG4-913-NH	20X20X4	19-3/8X19-3/8X3-3/4	1400	.43	33.9	14
LG4-910-NH	16X25X4	15-3/8X24-3/8X3-3/4	1400	.43	34.1	14
LG4-909-NH	16X20X4	15-3/8X19-3/8X3-3/4	1100	.43	27.1	14
LG4-903-NH	12X24X4	11-3/8X23-3/8X3-3/4	1000	.43	23.4	14
LG4-604-NH	24X24X4	23-3/8X23-3/8X3-3/4	2000	.23	49.1	11
LG4-612-NH	20X25X4	19-3/8X24-3/8X3-3/4	1750	.23	42.7	11
LG4-615-NH	20X24X4	19-3/8X23-3/8X3-3/4	1650	.23	40.9	11
LG4-613-NH	20X20X4	19-3/8X19-3/8X3-3/4	1400	.23	33.9	11
LG4-610-NH	16X25X4	15-3/8X24-3/8X3-3/4	1400	.23	34.1	11
LG4-609-NH	16X20X4	15-3/8X19-3/8X3-3/4	1100	.23	27.1	11
LG4-603-NH	12X24X4	11-3/8X23-3/8X3-3/4	1000	.23	23.4	11

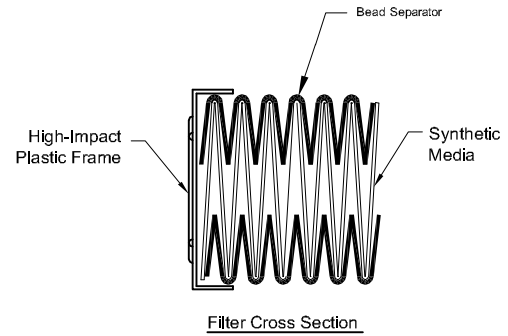

STANDARD CONSTRUCTION

1. 100% Synthetic Media
2. Bead Separator Packs
3. High-Impact Plastic Frame Panels
4. Foamed Hot Melt Sealant

NOTES

1. Testing for ASHRAE 52.2-1999
2. Final Resistance: 1.5" W.G.
3. Rated Velocity - 500 FPM
4. Maximum Operating Temperature: 140 deg. F
5. Class 1 Filter per UL Standard 900
6. Special Sizes Not Available

P.O. Box 32578
 Louisville, KY 40232
 P: 866-247-4827
 F: 502-961-0930

CONTACT FACTORY TO VERIFY REVISION LEVEL

TOLERANCES UNLESS OTHERWISE SPECIFIED

- FRACTIONAL —
 DECIMAL —
 ANGLES —

ALL DIMENSIONS IN INCHES

DRAWING NAME **4" LEGACY NH**

APPROVED BY <i>K. Quinn</i>	SPECIFICATION NO. MKT-B-00527	PAGE 1 OF 1
SCALE NONE	DWG. SIZE A	REVISION D
		REVISION DATE 03-31-11

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.